
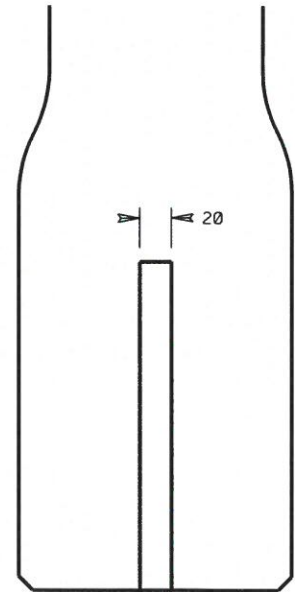


ACME THREAD



MANUFACTURING TOLERANCES:

- ± 2mm FOR INDICATED CASTING DIMENSIONS OF 190mm OR LESS
- ± 3mm FOR INDICATED CASTING DIMENSIONS OF 191mm TO 280mm
- ± 4mm FOR INDICATED CASTING DIMENSIONS OF 281mm TO 380mm

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE SPECIFIED.
2. TWO STANDARD OVERALL LENGTHS: 1520 (5 ft) AND 914 (3 ft).
3. MINIMUM 300mm OF THREADS AVAILABLE FROM TOP SECTION TO BOTTOM SECTION FOR RAISING AND LOWERING.

20170214 15:05 cawright 2512-3.DGN

VALVE CASING MIDDLE EXTENSIONS



APPROVED
MARCH 2017

DRAWN BY
DV/CW

APPROVED

Susan O

DRAWING NUMBER

2512-03

SCALE
N T S

CHECKED BY
David M.

DIRECTOR, WATER DISTRIBUTION AND TRANSMISSION

REVISION 0