



PLAN



COUPLING "STOP" DETAIL
SCALE N.T.S.

TYPE 6A OR FLOATING TYPE FRAME AND COVER WITH 2 - 25mm HOLES WITH PLUGS & MARKED "WATER"

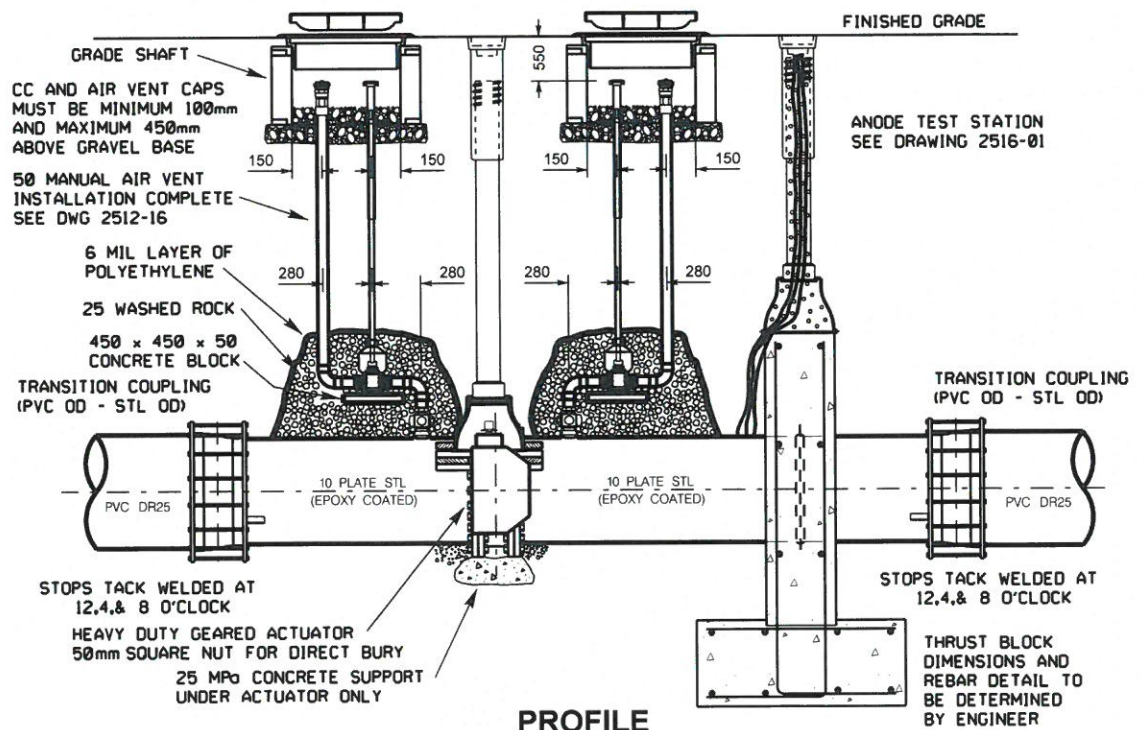

PROFILE

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE SPECIFIED.
2. AIR VENTS MAY ALSO BE LOCATED IN THE BOULEVARD. SEE DWG 2512-17 AND 2512-18
3. LOCATION OF AIR VENTS MUST BE SHOWN ON THE ENGINEERING DRAWINGS AND AS-BUILTS
4. ACTUATOR NUT MUST BE LOCATED ON THE SIDE OPPOSITE THE FACE OF CURB.
5. COMPACT GRAVEL BASE TO A MINIMUM 100% OF THE MAXIMUM DENSITY IN THE ROADWAY, AND 95% IN THE BOULEVARD.

	<h2 style="margin: 0;">450mm TO 750mm DIRECT BURY BUTTERFLY VALVE WITH AIR VENTS</h2>		DRAWING NUMBER	
	APPROVED MARCH 2017	DRAWN BY DV/CW		<h1 style="margin: 0;">2512-14</h1>
	SCALE N T S	CHECKED BY David M.	DIRECTOR, WATER DISTRIBUTION AND TRANSMISSION	REVISION 0