


ANODE WIRE CASING PLUG

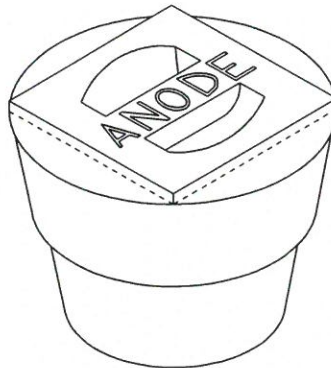


DESIGN SPECIFICATIONS

1. TOLERANCES OF ± 3 mm ALLOWED FOR CASTING DIMENSIONS OF 25mm OR LESS.
2. TOLERANCES OF ± 6 mm ALLOWED FOR CASTING DIMENSIONS IN EXCESS OF 25mm.
3. ALL PLUGS TO BE DUCTILE IRON TO ASTM 536 GRADE 60-40-18.

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE SPECIFIED.
2. SEE DRAWINGS 2512-01 TO 2512-07 FOR VALVE CASING DETAILS FOR USE AS ANODE WIRE CASINGS.

20170215 11:06 cawright 2516-5.DGN

	TEST STATION PLUG DETAIL			DRAWING NUMBER
	APPROVED MARCH 2017	DRAWN BY <i>Dale Vandenberg</i>	APPROVED <i>Susan Ol</i>	2516-05
SCALE N T S	CHECKED BY Doug S.	DIRECTOR, WATER DISTRIBUTION AND TRANSMISSION		REVISION 0